




**BENTLEY**<sup>®</sup>  
DISCORD



LEFT  
**DISCORD**  
4DCT50220T  
Division 402248  
24 in x 24 in  
MONOLITHIC

RIGHT  
FIELD: **DISCORD**  
4DCT50AA0T, 18 in x 36 in  
Turbulent 402252  
ASHLAR  
  
WITH ACCENTS:  
4DCT509A0T, 9 in x 36 in  
Turbulent 402252  
Ruckus 402253



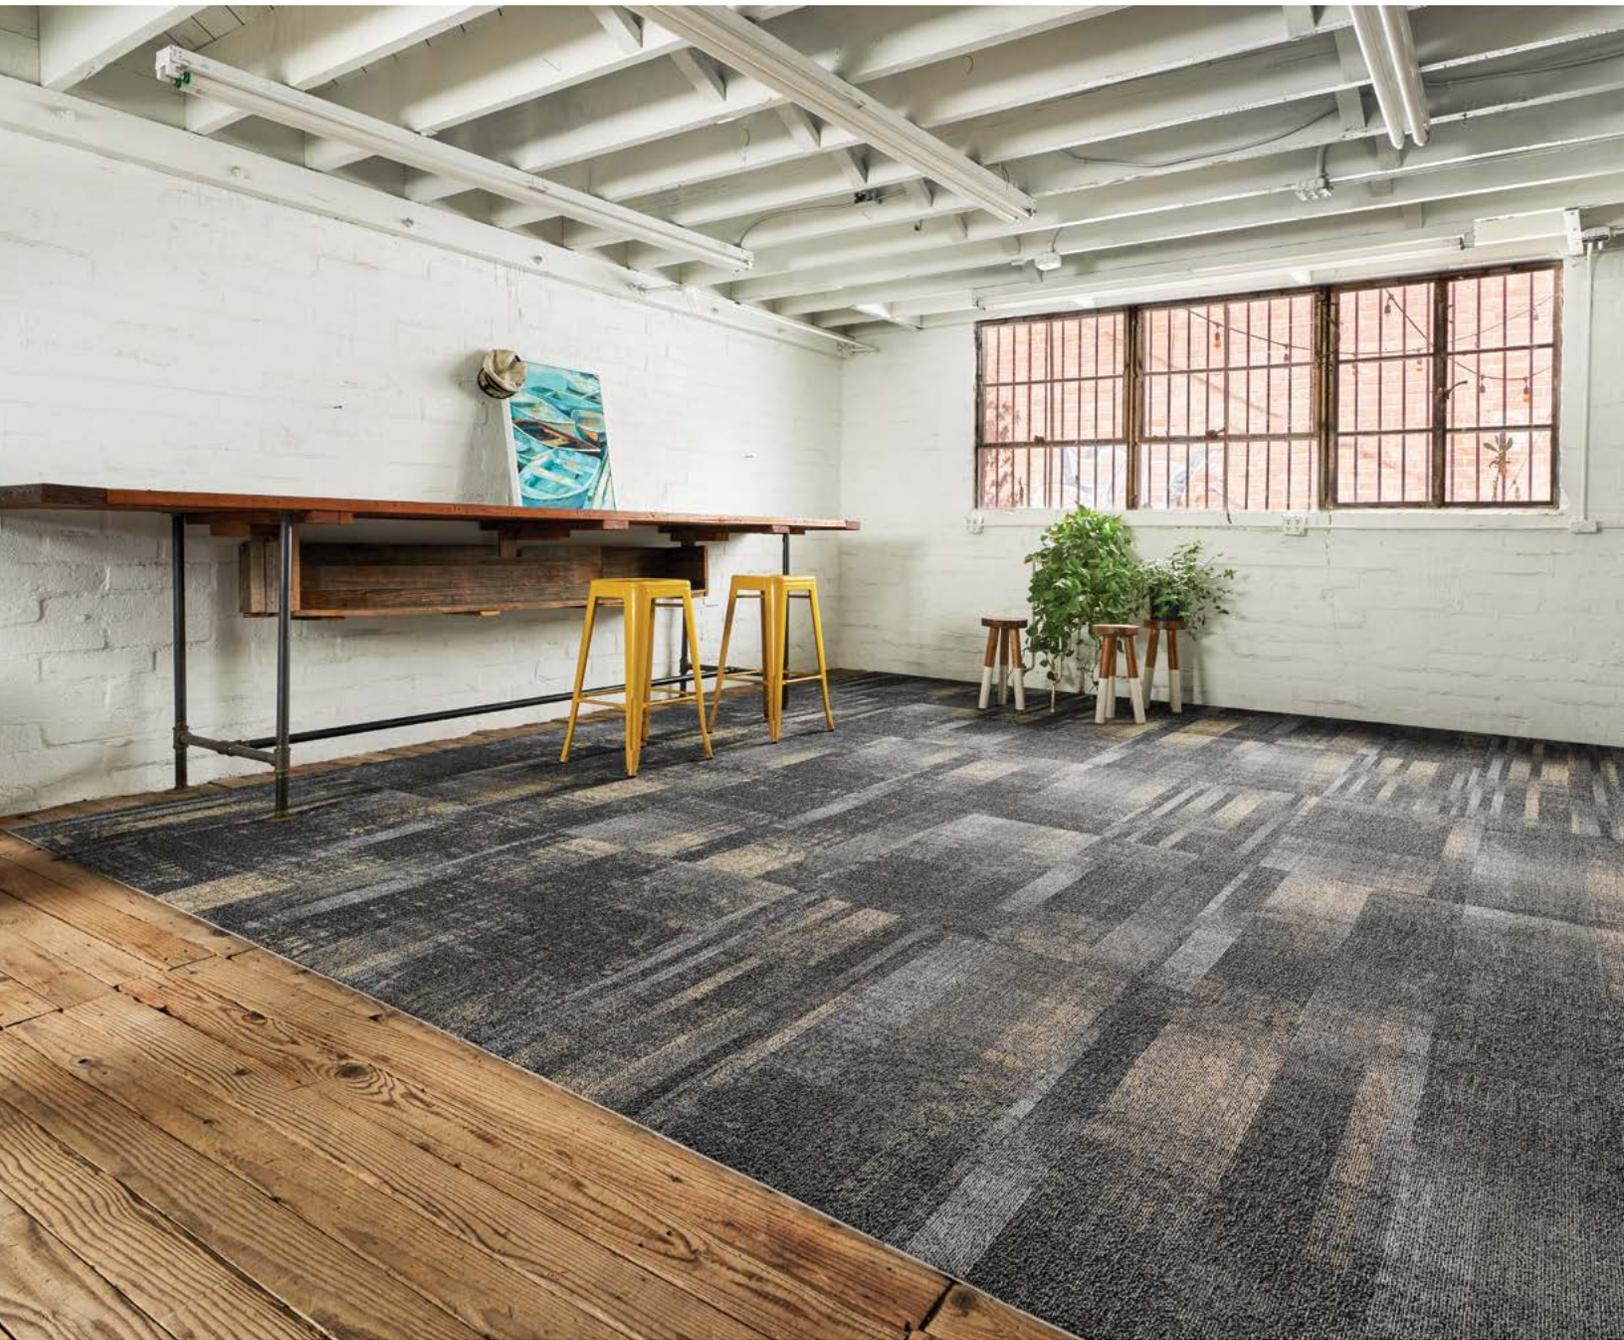

LEFT

**DISCORD**

4DCT50AA0T

Clamor 402250

18 in x 36 in

MONOLITHIC

RIGHT

**DISCORD**

4DCT509A0T

Frenzy 402240

Racket 402244

Division 402248

9 in x 36 in

MONOLITHIC







**DISCORD**  
4DCT589A8T  
Frenzy 402240  
Turbulent 402252  
Ruckus 402253  
9 in x 36 in  
HERRINGBONE



**DISCORD**  
4DCT509A0T  
Clamor 402250  
Turbulent 402252  
9 in x 36 in  
ASHLAR




**DISCORD**  
4DCT50220T  
Racket 402244  
24 in x 24 in  
BRICK


DISCORD color line as featured in architect folder.



Frenzy 402240



Seismic 402241



Clash 402242



Bedlam 402243



Racket 402244



Commotion 402245



Pandemonium 402246



Fracture 402247



Division 402248



Unruly 402249



Clamor 402250



Skirmish 402251



Turbulent 402252




Ruckus 402253


The printed images may not be an accurate reproduction of the product's actual colorways. Please note that images were taken in a loft, full of natural light. We strive to offer an authentic representation, but images may vary according to press run and location lighting. These images are intended as a guide only. If you would like a sample of this product, please call Customer Care at 800.423.4709.

RECOMMENDED CARPET TILE INSTALLATION METHODS


9 in x 36 in



Ashlar




Herringbone




Monolithic


18 in x 36 in



Ashlar



Brick




Herringbone



Monolithic

24 in x 24 in



Brick



Monolithic

Bentley's High PerformancePC, NexStep® Cushion Tile, AFIRMA™ Hardback Tile, and AFFIX™ Hardback Tile products are Cradle to Cradle Certified™ Silver. Bentley products are also certified under the NSF/ANSI Standard 140 – Sustainable Carpet Assessment (NSF 140). Seven of Bentley's standard backing products are NSF 140 certified at the Gold level or above. Bentley's carpet products are manufactured in our California mill, a LEED for Existing Buildings: Operations and Maintenance (LEED®-EBOM) Gold certified facility. Please inquire about product warranties for specific backing options.

Patterned carpet may require special attention by the installer to assure a suitable match, and must be addressed in the original labor quotation. Products that go through the shearing process may result in a small loss of yarn weight. Slight variations in color among different production lots are normal and should be considered in the overall installation plan. Carpet specifications and components are subject to normal manufacturing tolerances and may change without notice. Technical performance characteristics are subject to adjustment based on results of post-manufacture testing. Product warranted in accordance with the terms and conditions of Bentley's standard printed warranty in effect at time product is sold. All other warranties, including without limitation any implied warranties of merchantability or fitness for a particular purpose, are hereby disclaimed. Made in USA. Warning: unauthorized reproduction of this carpet design constitutes copyright infringement. ©2018 Bentley Mills, Inc.

# DISCORD™

## SPECIFICATIONS

Style Number	4DCT5
Product Construction	Tufted Textured Loop
Fiber	Antron® Lumena™ Type 6,6 Nylon
Dye Method	Solution Dyed
Soil/Stain Protection	XTERA™
Secondary Backing	NexStep® Cushion Tile / AFIRMA™ Hardback Tile / AFFIXX™ Hardback Tile
Machine Gauge	1/12 in (47.2 ends/10 cm)
Stitches	10.7/in (42.1 ends/10 cm)
Pile Density	4,936 oz/yd³
Total Weight	
NexStep® Cushion Tile	92 oz/yd² (3,119.3 g/m²)
AFIRMA™ Hardback Tile	73 oz/yd² (2,475.1 g/m²)
AFFIXX™ Hardback Tile	74 oz/yd² (2,509.0 g/m²)
Total Thickness	
NexStep® Cushion Tile	0.305 in (7.7 mm)
AFIRMA™ Hardback Tile	0.185 in (4.7 mm)
AFFIXX™ Hardback Tile	0.190 in (4.8 mm)
Pattern Repeat	None
Radiant Panel	Passes Class 1, ≥ 0.45 W/cm² (ASTM-E648)
Smoke Density	< 450 Dm corr (ASTM-E662), Flaming
Static	≤ 3.5 kV (AATCC-134), Step
Flammability	Passes Methenamine Pill Test (CPSC-FF1-70)



**DISCORD**  
 4DCT50AA0T  
 Frenzy 402240  
 Turbulent 402252  
 18 in x 36 in  
 BRICK

## STYLE NUMBERS

DISCORD	BACKING	SIZE
4DCT509A0T	NexStep® Cushion Tile	9 in x 36 in (22.86 cm x 91.44 cm)
4DCT50AA0T	NexStep® Cushion Tile	18 in x 36 in (45.72 cm x 91.44 cm)
4DCT50220T	NexStep® Cushion Tile	24 in x 24 in (60.96 cm x 60.96 cm)
4DCT509A0K	AFIRMA™ Hardback Tile	9 in x 36 in (22.86 cm x 91.44 cm)
4DCT50AA0K	AFIRMA™ Hardback Tile	18 in x 36 in (45.72 cm x 91.44 cm)
4DCT50220K	AFIRMA™ Hardback Tile	24 in x 24 in (60.96 cm x 60.96 cm)
4DCT509A0X	AFFIXX™ Hardback Tile	9 in x 36 in (22.86 cm x 91.44 cm)
4DCT50AA0X	AFFIXX™ Hardback Tile	18 in x 36 in (45.72 cm x 91.44 cm)
4DCT50220X	AFFIXX™ Hardback Tile	24 in x 24 in (60.96 cm x 60.96 cm)

CE Mark excludes AFFIXX™ Hardback Tile.

antron. 





800.423.4709 | BENTLEYMILLS.COM

14641 E. DON JULIAN ROAD, CITY OF INDUSTRY, CA 91746